

SHADES




PELMET DETAILS

BLINDS, CURTAINS, SHUTTERS and AWNINGS


lifebyshades.com

Typical internal pelmet details


Type: P1
Dual roller reverse roll

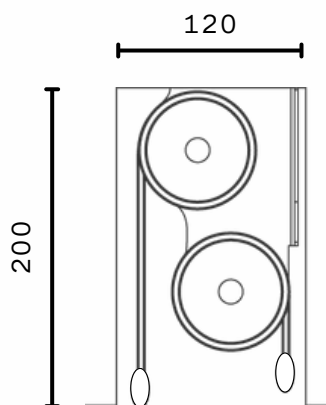


Type: P2
Dual roller standard roll

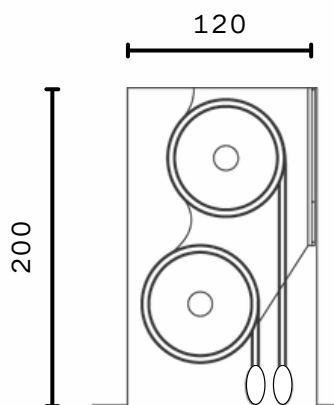


Type: P3
2 x single rollers

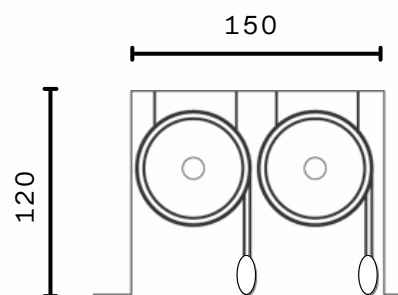


Type: P4
1 x single roller




Type: P5
1 x roller & pencil/ inverted pleat curtain

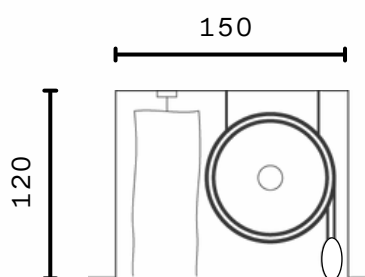


Type: P6
1 x roller & S-fold curtain

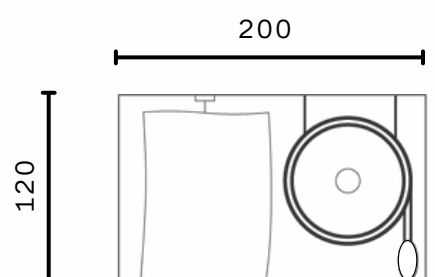

Type: P7
1 x S-fold curtain



Type: P8
**1 x S-fold sheer curtain &
1 x pencil pleat separate lining**

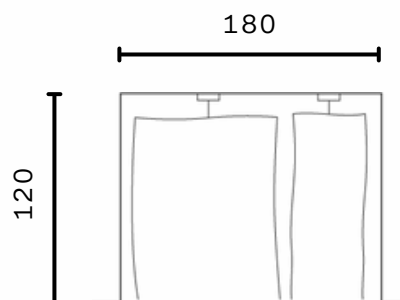


All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

Typical internal pelmet details continued


Type: P9

1 x S-fold sheer curtain &
1 x S-fold separate lining

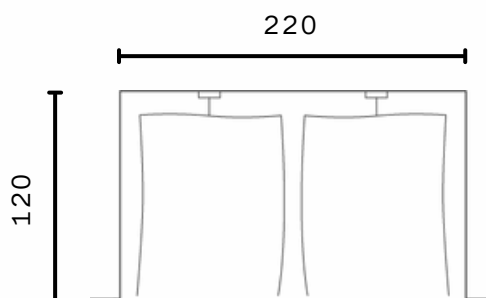

Type: P10


2 x separate pencil pleat headings

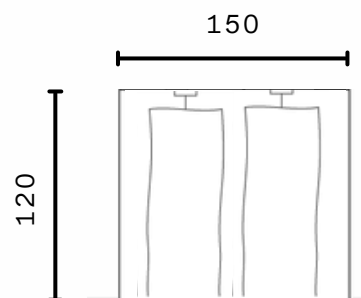

Curved track pelmet details


Type: CP1

Single hand traverse
S-fold curtain track

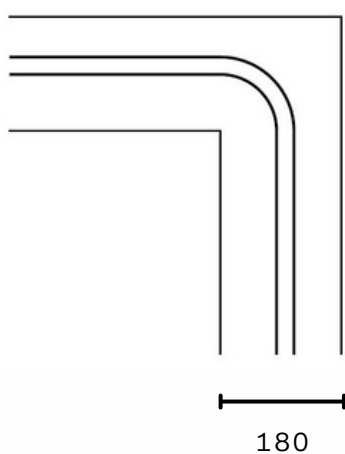


Type: CP2

Double hand traverse
S-fold curtain tracks

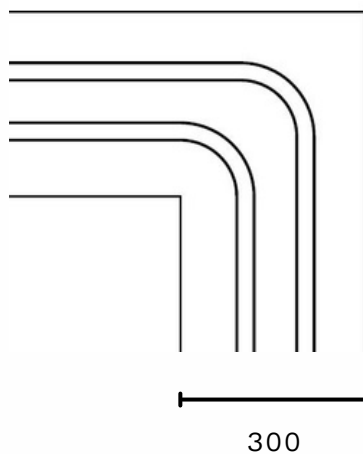

Type: CP3

Somfy Glydea
S-fold curtain track

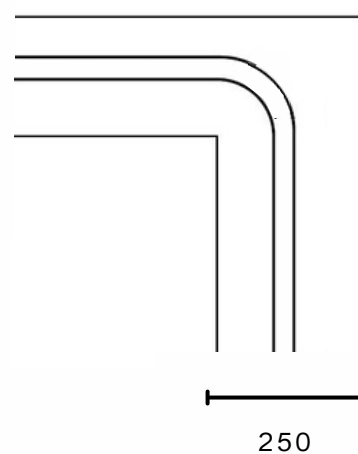


All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

Typical external pelmet details

Type: EP1

External Venetian


***Based on a 2500mm drop**

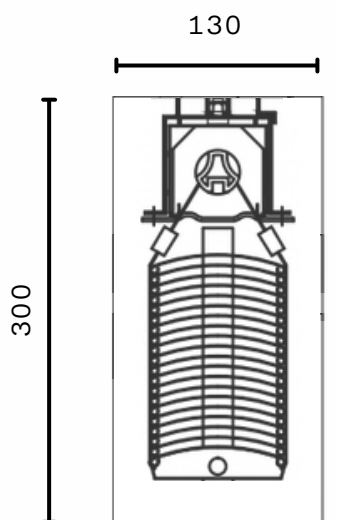

VENETIAN DROP	STACK HEIGHT
750-1000	180
1001-1250	200
1251-1500	220
1501-1750	240
1751-2000	260
2001-2250	280
2551-2500	300
2501-2750	320
2751-3000	340
3001-3250	360
3251-3500	380
3501-3750	400
3751-4000	420

Type: EP2

Cable Guide Awning (Straight Drop)

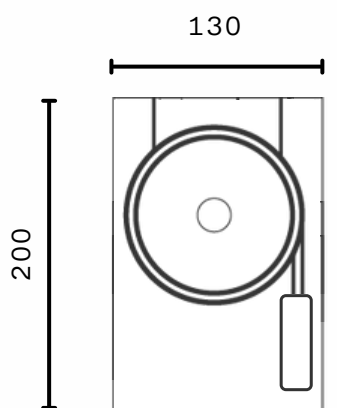

All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

SHADES




FLUSH MOUNT TRACK DETAILS

BLINDS, CURTAINS, SHUTTERS and AWNINGS


lifebyshades.com

Flush mount track specifications (MANUAL)


Type: FM1
Single S-fold flush mount installation detail

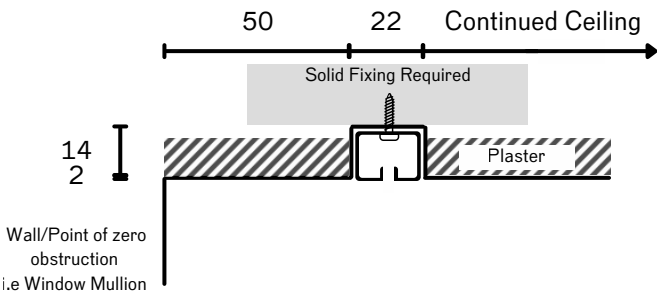

Type: FM2
Double S-fold flush mount installation detail

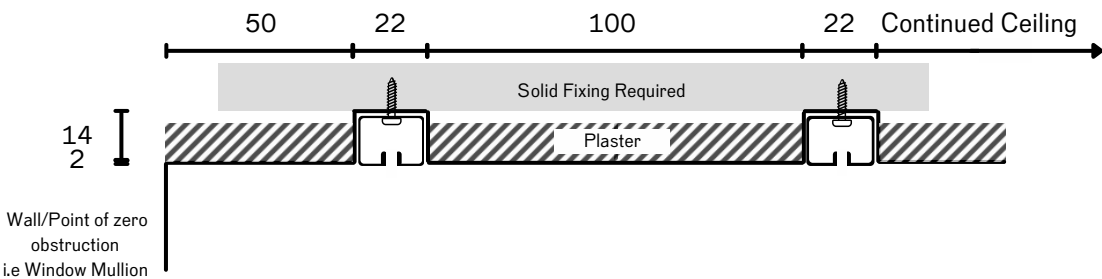

Type: FM3
Roller blind & S-fold flush mount track installation detail

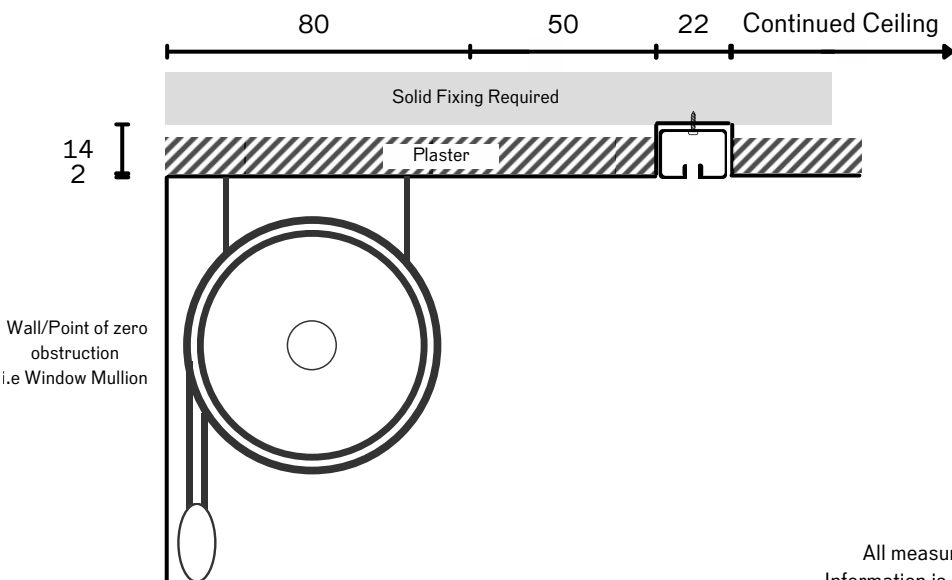

All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.



Type: FM4

Single S-fold flanged flush mount installation detail

Limitations: Requires low gauge screw with minimum size pan-head


Hand traverse only

Recommended for light-weight curtains only

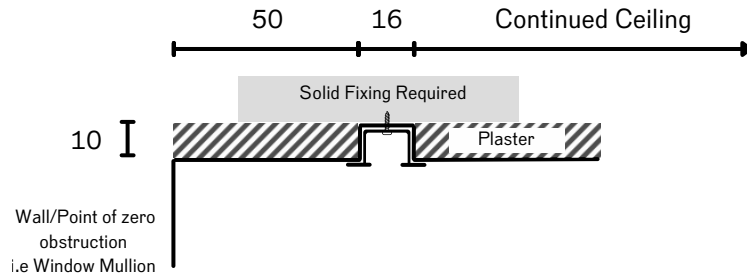


Type: FM5

Double S-fold flanged flush mount installation detail

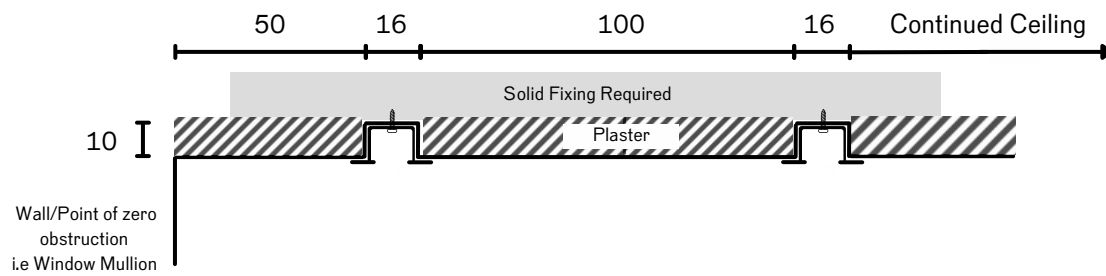

Type: FM6

Roller blind & S-fold flanged flush mount track installation detail

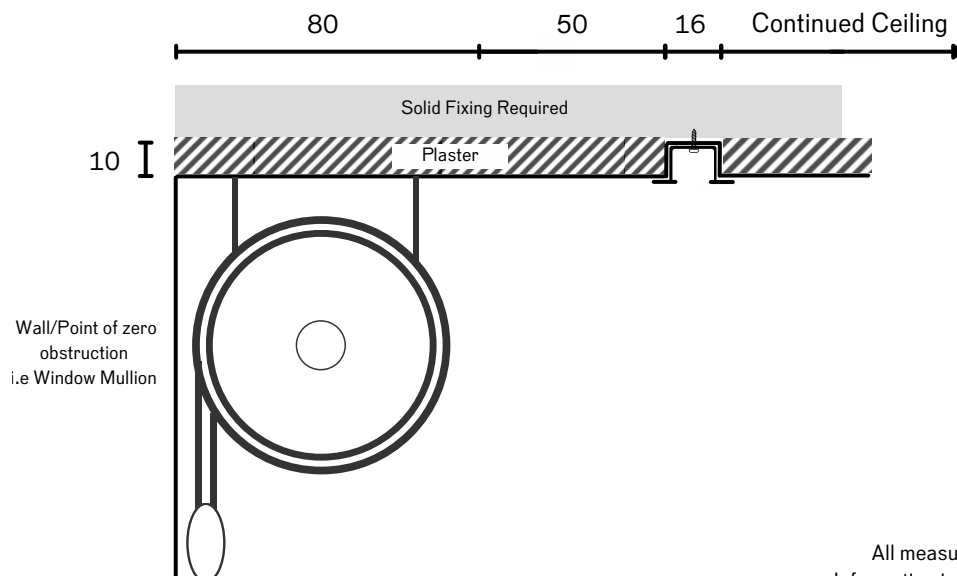

All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

Curved Flush Mount track details


Type: CF1

Single hand traverse

S-fold curtain track

150mm radial bend

It is recommended that SHADES provide a template for all flush-mount curved tracks

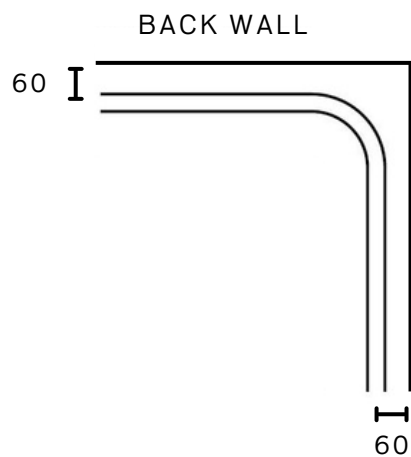

Type: FM1

Example below of the preparation works required for an FM1 track installation.

- 90mm * 35mm timber has been installed with the underside of the timber, level with the top edge of the plaster, or the underside of the furring channels.
- The timber was pre-routed at a width of 22mm wide and 4mm deep, at a spacing of 60mm to the centre of the routed section from the back wall (NOTE - This 60mm to the centre needs to be from the back wall OR any point of obstruction. I.e. a window mullion)
- Once the ceiling is sheeted with the plaster, the 4mm routed section in combination with the 10mm plaster provides a 14mm depth.
- Ideally the plasterer will use a plaster tear-away strip on each plastered edge, leaving a clean-edged 22mm wide X 14mm deep opening.
- SHADES can then install the track, with a 2mm lip, and 1mm on each side for a clean caulked finished.



All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

SHADES



MOTORISED TRACK DETAILS


BLINDS, CURTAINS, SHUTTERS and AWNINGS

lifebys Shades.com


Track specifications (MOTORISED)

Somfy Glydea track detail


Type: SM1
Somfy Glydea
300mm radial bend

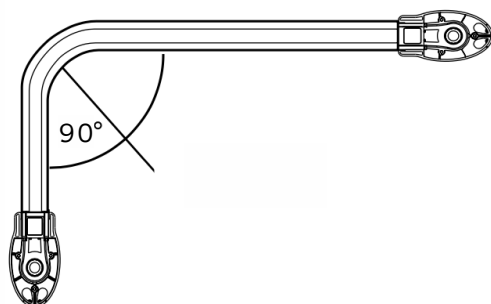

Type: SM2
Somfy Glydea
Track Profile

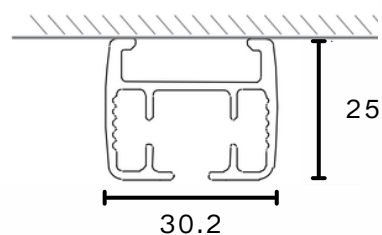


Type: SMP1
Somfy Glydea
Pelmet Detail

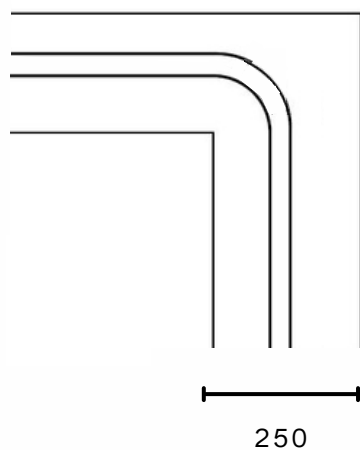


Type: SM3
Single S-fold flush mount installation detail

***Please note, on the motor end of the track, a recess allowance will be required for the Oval-shaped Motor-Head as per below:**

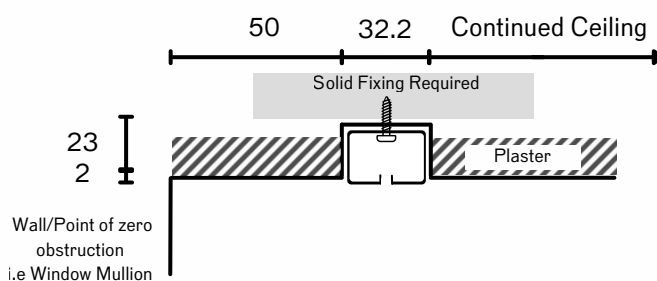

Type: Oval-Shaped Motor-Head

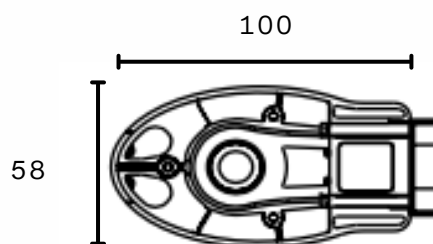

All measurements supplied are in millimetres.
Information is general only, and not 'site-specific'.
Contact SHADES to arrange a site visit to discuss further.

For further information, please contact our showroom on +61 (3) 9882 1166.

